



SHARK 282





SHARK 282, manual band sawing machine to cut from 45° right to 60° left.

The vice on the pneumatic versions (MA) opens and closes by means of a manually operated valve (or by means of a footpedal which is instead optional).

A FEW FEATURES:

- Hydraulic transducer to visualize band tensioning.
- Wire chip brush for band cleaning.
- Double head return spring.
- Sliding vice with sideways movement and fast-positioning system.
- Wide working surface with rotating table installed on a roller bearing, dia. 265 mm, pre-loaded with thrust bearing.

- Adjustable precision stops for cuts at 0°, 45°, 60° left and 45° right.
- Steel base with removable coolant tray.
- Electric pump for band lubrication and cooling.
- Machine arranged for handling with movement equipment.
- Adjustable rod to measure stop to make cuts of the same length with millimetric steel rod.
- Stock support arm with roller predisposed to mount loading table.
- Bi-metal band for solids and sections.
- Service keys and instructions manual for maintenance and spare parts list.
- The CUT CONTROL SYSTEM (CCS) can be retrofitted on machines out in the field.



SHARK 282/282CCS

OPTIONALS FROM PAG 61 - N° 02 - 03 - 04 - 08 - 09 - 11 - 20 - 34 - 71

mm	kW	m/min	mm	Cutting Capacity			kg
				0°	45°	60°	
2950x27x0,9	1,5/1,8	36/72	285	250	220	280x220	440
				230	200	220x200	
				120	80	140x80	
				200	170	200x140	




SHARK


282 CCS



SHARK 282 CCS (Cut Control System) manual bandsawing machine to cut from 45° right up to 60° left. Other than the manual cut mode, the sawing machine can make single cuts without operator, using the head weight controlled by a hydraulic brake: after the cut, the band stops. The frame at this point is manually lifted to the position needed in order to reposition the bar to cut. In the version with pneumatic vice (MA) the vice is opened/closed by a manually-controlled valve (optional with pedal control).
A FEW FEATURES: See SHARK 282



SHARK 282CCS

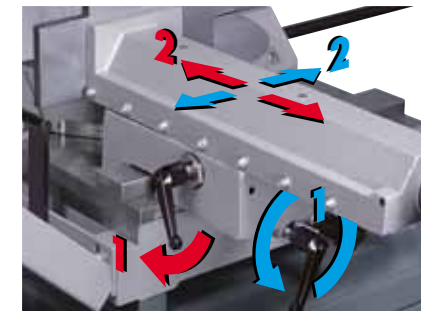

SHARK 282/282CCS



SHARK 282/282CCS

OPTIONALS FROM PAG 61 - N° 02 - 03 - 04 - 09 - 11 - 20 - 34 - 71

mm	kW	m/min	mm	Bar			kg
				0°	45°	60°	
2950x27x0,9	1,5/1,8	36/72	285	250	220	280x220	440
				230	200	220x200	
				120	80	140x80	
				200	170	200x140	

